

## TECHNICAL DATA SHEET

### QUADREO BASSO DUO

S2111-L






#### Technical specs

Lamp + fitting	double fitting, suitable for any LED QR111 G53
Control gear	order separately, <b>provide enough space in ceiling</b>
Orientation	30° tilt / 360° rotation
Material	patented composite, paintable
Finish	natural white
Opening	250 x 125 mm
Cut out	plasterboard (PB): 354 x 248 mm concrete (CC): 266 x 141 mm
Total installation depth	plasterboard (PB): 67,5 mm concrete (CC): 74 mm

#### Order codes

S2111-L PB	housing for plasterboard ceiling
S2111-L CC	housing for concrete ceiling
111A3	adjustable lampholder for QR111
XiLAR111	LED QR111 with phase dimmable driver

#### Dimensions

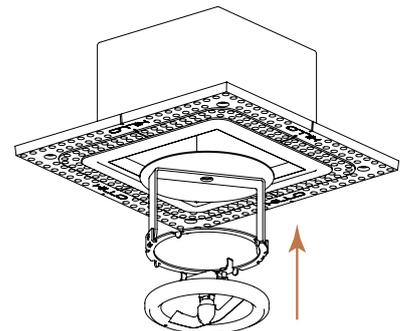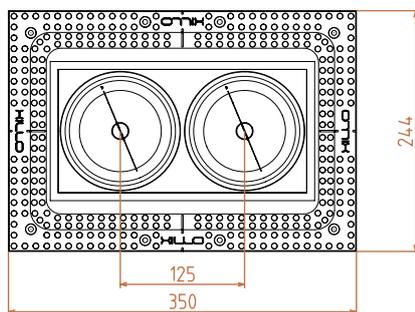

#### Light - XILAR111



CCT	2700
CRI	90
Output	780 lm
Beam angle	24°
Power supply	18 VDC
Wattage	15 W

60°C. Do not use incandescent, halogen, or any other high temperature emitting lightbulbs

#### Light - DMX



Colors	4
Output	950 lm
Beam angle	60°
Power supply	24 VDC
Wattage	19 W

