XILLO
INNOVATIVE RECESSED SOLUTIONS

# TECHNICAL DATA SHEET

## GRANDIO DUO

C2111

### Technical specs

| | |
|---|---|
| Lamp + fitting | double fitting, suitable for any LED QR111 G53 |
| Control gear | order separately, provide enough space in ceiling |
| Orientation | 30° tilt / 360° rotation |
| Material | patented composite, paintable |
| Finish | natural white |
| Opening | 2x Ø 127,5 mm |
| Cut out | plasterboard (PB): 379 x 319 mm |
| Total installation depth | plasterboard (PB): 103,5 mm |
| | REMOVE STICKERS FROM THE MAGNETS AFTER PAINTING |

### Order codes

| | |
|---|---|
| C2111 PB | housing for plasterboard ceiling |
| 111A3 | Adjustable lampholder for QR111 |
| XilAR111 | LED QR111 with phase dimmable driver |

| | |
|---|---|
| -> Input | 200 - 250V, 50/60Hz, 0,11A |
| Output | 12 - 24 VDC, 700mA |
| Dimensions | 134 x 44 x 29 mm |

### Dimensions







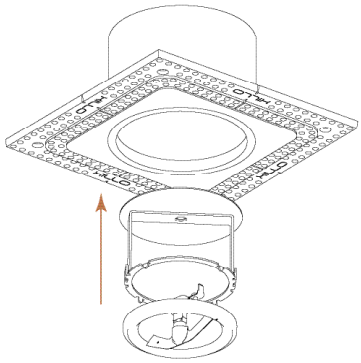

### Lamp - XILAR111

| | |
|---|---|
| CCT | 2700 |
| CRI | 90 |
| Output | 780 lm |
| Beam angle | 24° |
| Power supply | 18 VDC |
| Wattage | 15 W |

60°C, Do not use incandescent, halogen, or any other high temperature emitting lightbulbs

### Lamp - DMX

| | |
|---|---|
| Colors | 4 |
| Output | 950 lm |
| Beam angle | 60° |
| Power supply | 24 VDC |
| Wattage | 19 W |

© Xillo bvba - info@xillo.be - www.xillo.be - last update 17-06-2021

IP20