

TECHNICAL DATA SHEET

FENTO TONDO

CF11xx



Technical specs

Connection	pipe with diameter 100mm or 125mm
Material	patented composite, paintable
Finish	natural white
Opening	Ø 200 mm (Ø 174 mm)
Cut out	plasterboard (PB): 304 x 304 mm concrete (CC): Ø 230 mm
Total installation depth	plasterboard (PB): 44,5 mm (with pipe: 114,5 mm) concrete (CC): 52 mm (with pipe: 124 mm)


Order codes

CF1100 CC	housing for concrete ceiling with tube diameter 100mm
CF1125 CC	housing for concrete ceiling with tube diameter 125mm
CF1100PB	housing for plasterboard ceiling with tube diameter 100mm
CF1125 PB	housing for plasterboard ceiling with tube diameter 125mm


Specifications

Flow rate	23m ³ -> 80m ³
Decibels	< 30 dB - 50 dB

Dimensions

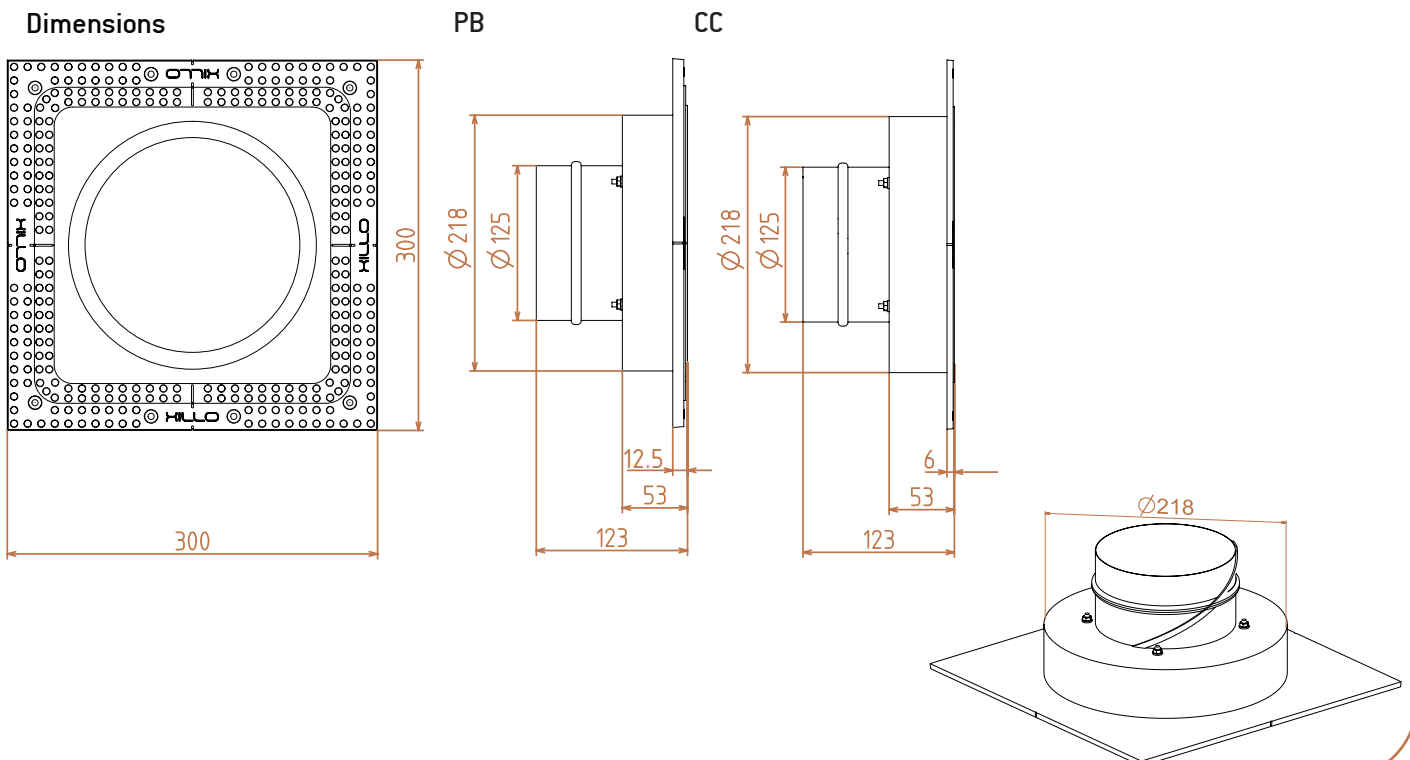

Warning: XILLO should be installed under normal t° conditions between 10°C and 45°C and in constant heated areas which have a constant t°. Furthermore, it should be installed using **screws, fiberglass netting and plaster** (do not use silicone, glue,...). Make sure the studs/support wall is strong, firm and dry and that the XILLO is strongly screwed on the studs/support so it can not move.



IP20



TECHNICAL DATA SHEET


FENTO TONDO

CF11xx


Specifications

Level 0 (open)

Level 21 (closed)

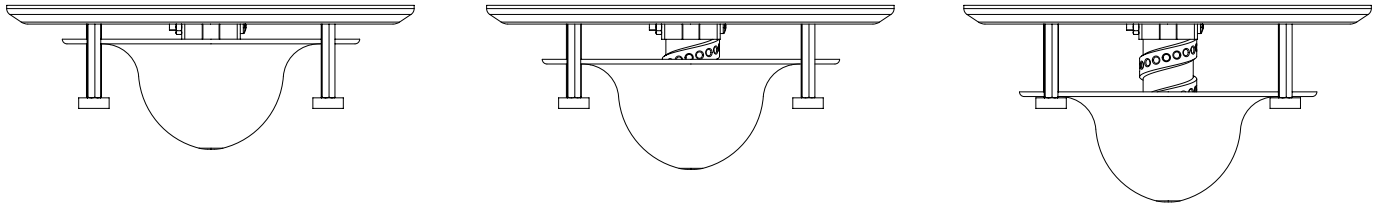


- 1) Pull the front plate out of the Xillo fixture. These are fixed with four magnets.
- 2) Twist the round airflow piece to move it up or down for a bigger or smaller flow rate.
- 3) Put the front plate back. BEWARE of perfect installation so that the four magnets are in place.

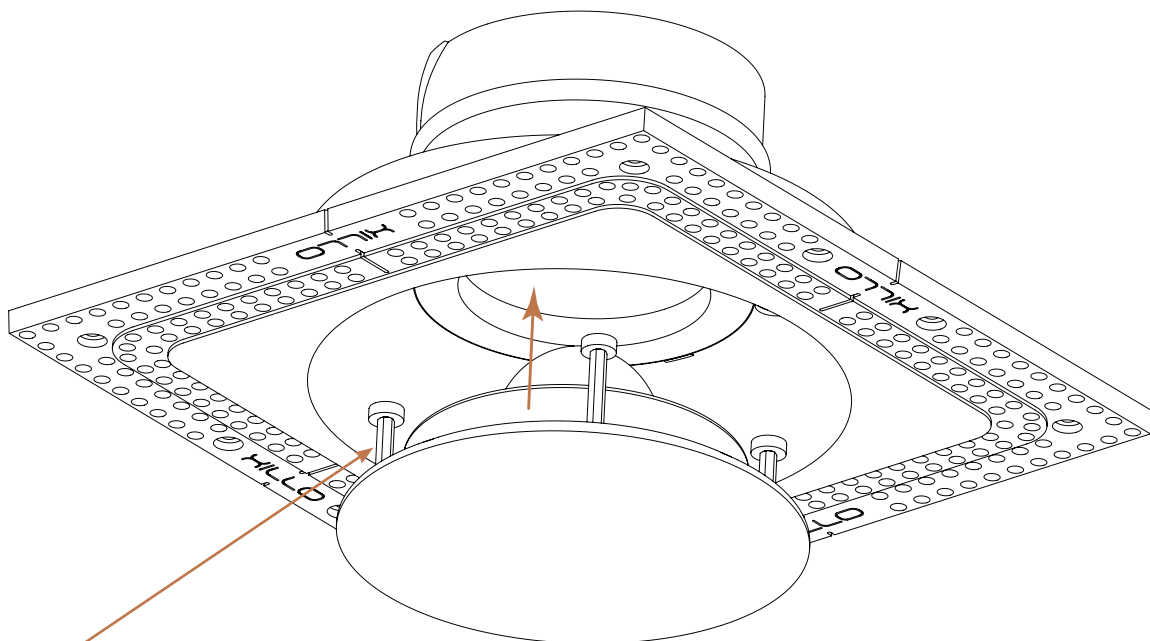

NOTE: paint these (same color as ceiling/wall) for a better finish

Warning: XILLO should be installed under normal t° conditions between **10°C and 45°C** and in constant heated areas which have a constant t°. Furthermore, it should be installed using **screws, fiberglass netting and plaster** (do not use silicone, glue,...). Make sure the studs/support wall is strong, firm and dry and that the XILLO is strongly screwed on the studs/support so it can not move.

© Xillo bvba - info@xillo.be - www.xillo.be - last update 11-08-2023



CE



IP20

